


BOOSTER GSM

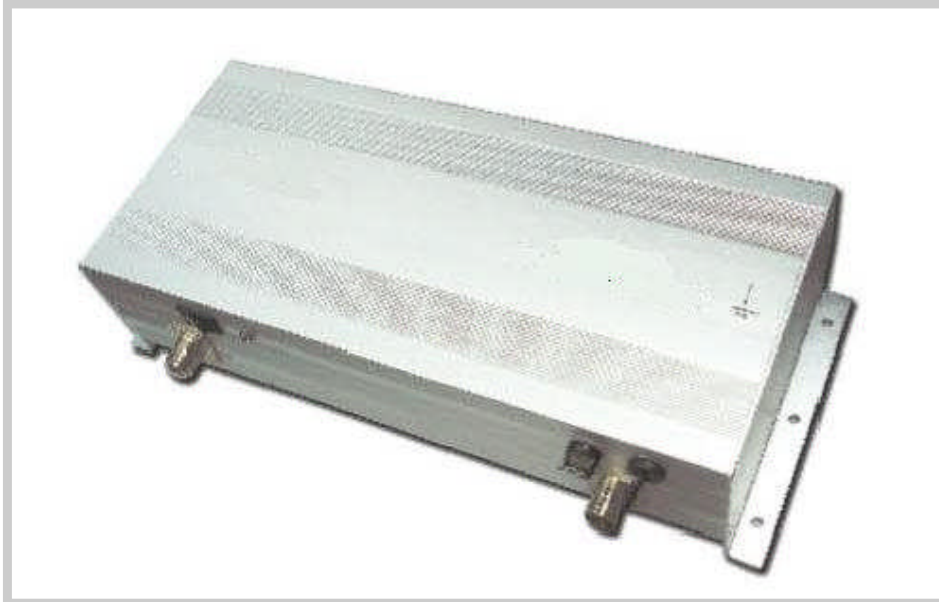

Caracteristiques

Frequency Range

Output Power (3 rd> 4rd)

Gain

In-band Ripple

Group Delay

Spurious Emission Out-band

Impedance

Power Supply

Temperature Range (°C)

Humidity Relative (%)

800 m2 de couverture en intérieur
Deux ports full duplex

Up Link : 890-915 MHz
Down Link : 935-960 MHz
UL : 20 dB, DL : 20 dB

UL: 40 dB, DL: 50 dB

3 dB

1.5 us

≤-40 dBm

50 Ω

AC 220V/AC 110V DC 10V

-25°C to + 55°C

5%-95%