



✓ GPS

✓ GSM

✓ GPRS


✓ UMTS

Mounting position	Dash Board, Windscreen, any metallic surface
Impedance	50 ohms
Frequency	GPS 1575.42 MHz GSM 900MHz , 1800 MHz / UMTS 2,1GHz
Polarization	RHCP Vertical
LNA Gain	32dB typ.(5V)
Voltage supply	1.8V to 5V
Current	5mA (1.8V), 13mA (3.3V), 25mA (5V)
Connector	Upon request
Housing	40 mm x 50 mm x 12.7 mm
Operating temperature	-40°C to + 85°C
Cable	RG174




COMBI ANTENNAS

3V

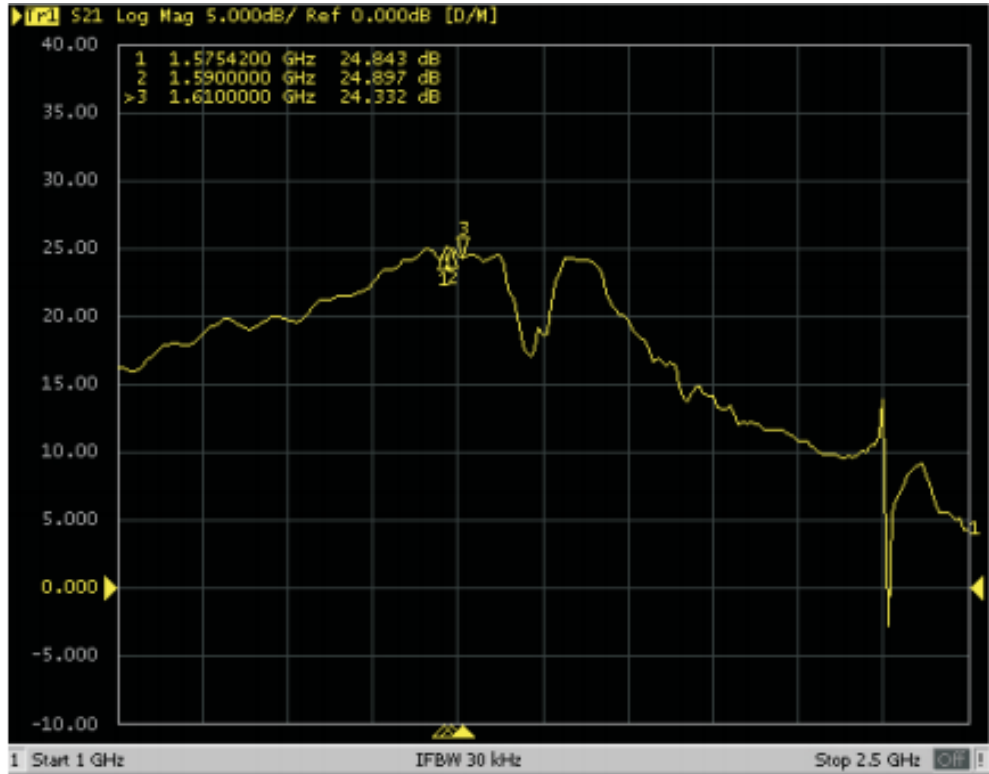

5V

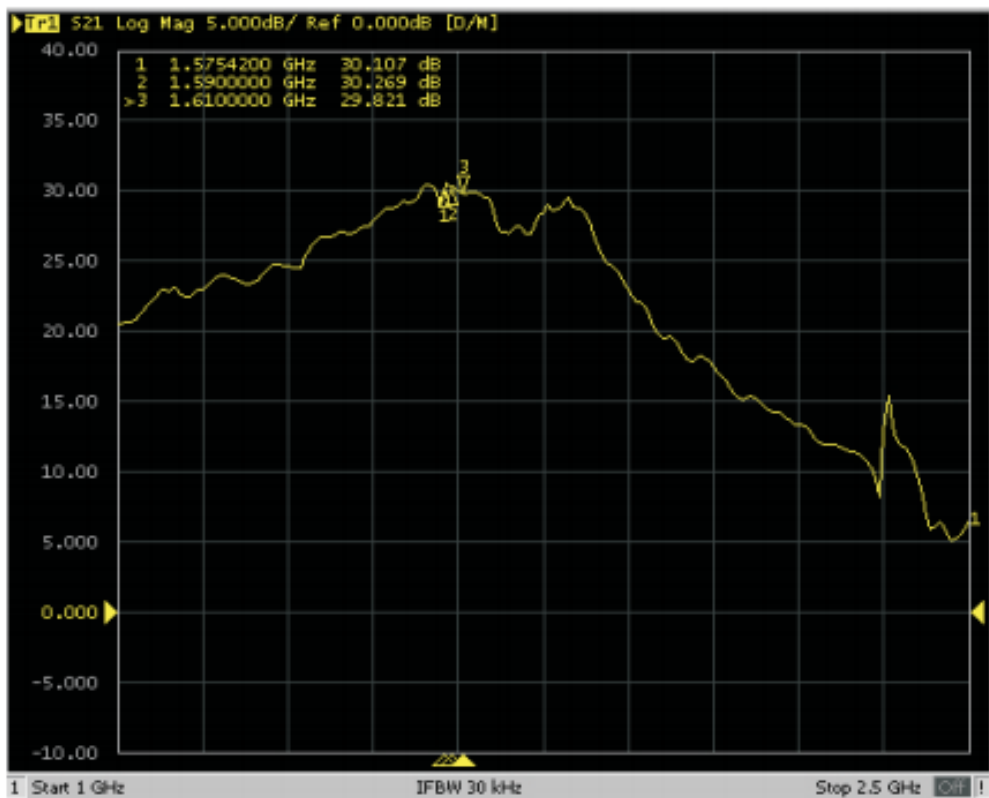



GSM

