

TELEMATIC ANTENNAS



✓ GSM

✓ GPRS

✓ UMTS


✓ WIFI


✓ Bluetooth

Impedance	50 ohms
Frequency	AMPS824~894 MHz / GSM~GPRS 900MHz, 1800 MHz PCN 1900 MHz / UMTS 2100 MHz Wifi & Bluetooth 2400 MHz
Polarization	Horizontal
Gain MHz : dBi	GSM : 2.2dBi
VSWR	<2:1 Max
Connector	SMA(f) 90°
Housing	53mm x 9.65mm
Operating temperature	-40°C to + 85°C




TELEMATIC ANTENNAS

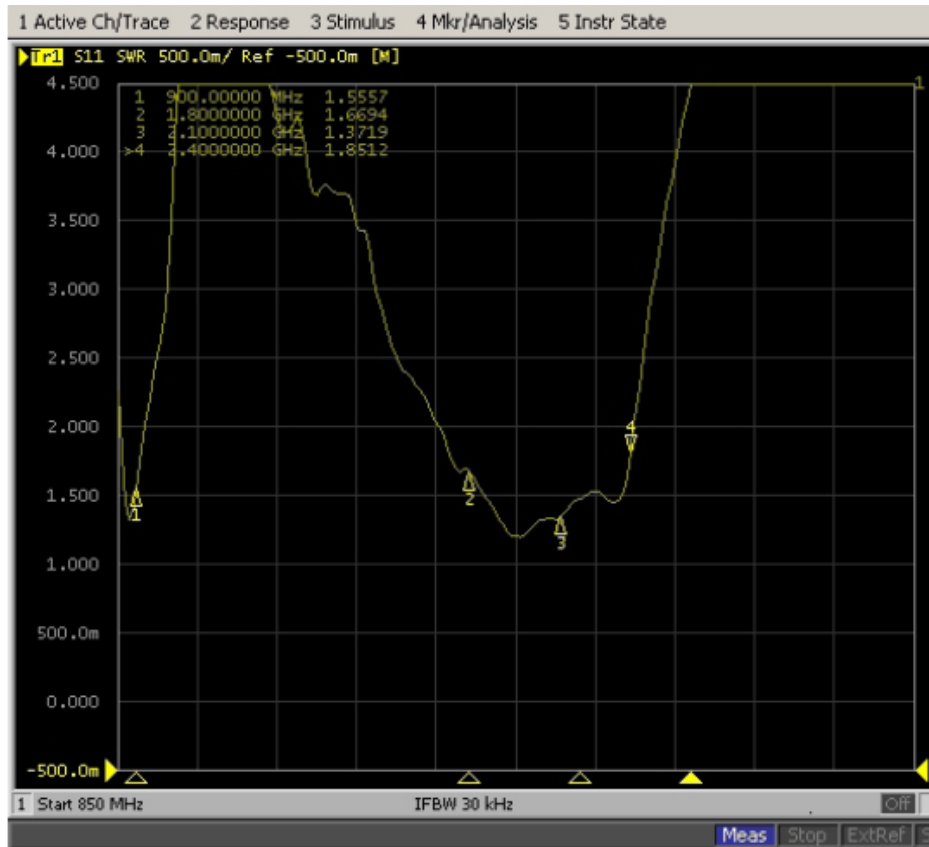

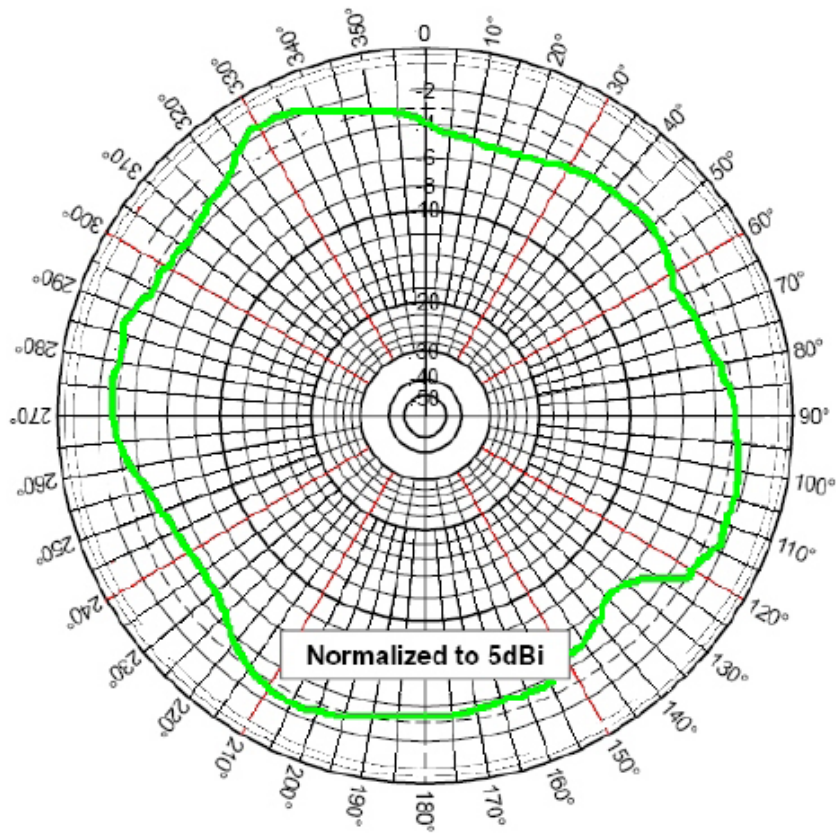

Azimuthal Pattern (X, Y or E-Plane)

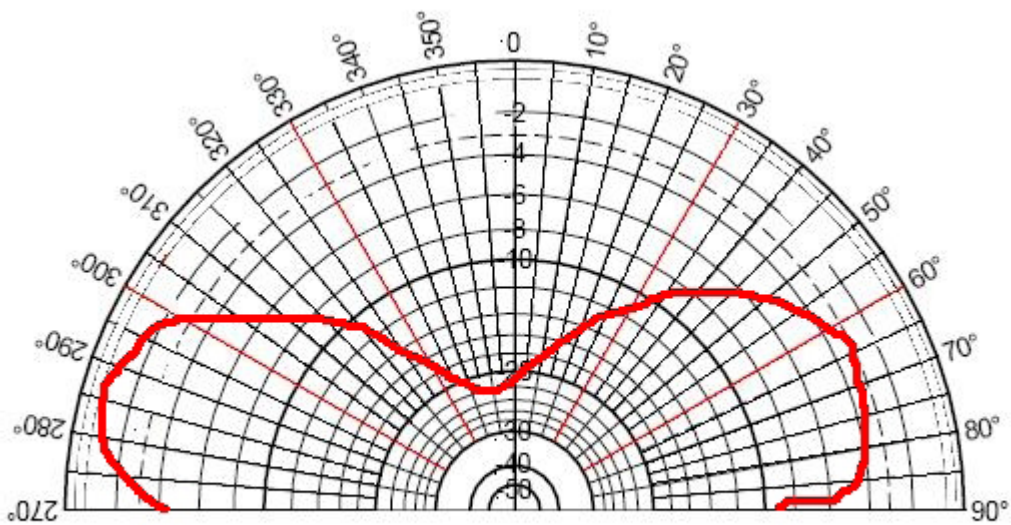

Elevation Pattern (Z, Y or H-Plane)